

TECHNICAL DATA E-PRO

Refrigerated display

The E-Pro range of cold units includes various types of refrigerated drawers, cabinets and worktops. Thanks to the flexible modular construction, they are easy to combine to create a customised food service system that best suits personal requirements. All units are made of stainless steel and comply with the hygiene standards for professional kitchens.



GENERAL

- Products are designed for the short-term storage and serving of cold food
- All surfaces are made of stainless steel
- Ø63mm adjustable feet, with a height adjustment range of -30/+30mm
- GN-sized cupboards and wells
- Removable PVC plastic magnetic gaskets
- The refrigerated wells have hygienic rounded corners
- Cold well feature GN-sized adjustable and tilt able grills
- As a standard feature there are LED lamps that produce no extra heat

PERFORMANCE

- The technical features of products are designed to meet the requirements of cold storage in +25°C ambient temperature.
The capacity is verified by laboratory experiments
- The temperature can be adjusted between +4 and +15°C. Temperature is +6 to +17°C in display case and individually controlled on each shelf
- The thermostat control includes a digital temperature display
- The ventilated refrigeration in the glass display case and cupboard guarantees even temperature distribution


TECHNICAL FEATURES

- The units have 50mm thick walls, insulating material polyurethane
- CFC and HCFC free
- The refrigerant is R290
- The refrigeration module is removable without tools and comes with automatic defrost and evaporation of defrost water
- The glass display case is made of safety glass and acryl plastic with rounded corners
- All E-Pro cold units are CE marked



Refrigerated display, CDDL serie

- Temperature range: **+4...+15°C** (maximun ambient temperature of +25 °C in cold storage)
- Refrigerator modules: **CH1**
- Unit modules: **1**

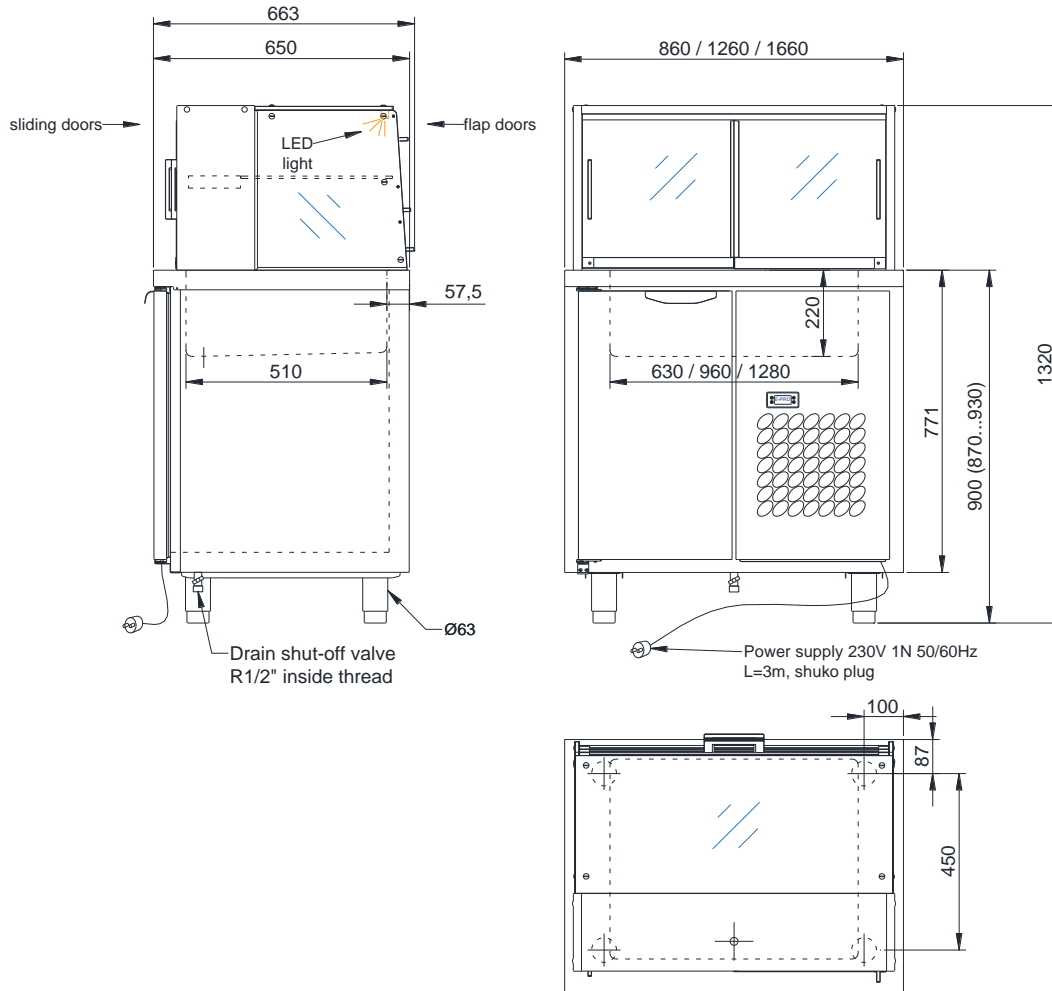


TECHNICAL DATA			
Model	CDDL-1-CH1	CDDL-1-CH1-1	CDDL-1-CH1-1-1
External dimensions w x d x h mm	860x650x1320	1260x650x1320	1660x650x1320
Temperature range cupboard (cold well and display case) °C	+4...+15 (+6...+17)	+4...+15 (+6...+17)	+4...+15 (+6...+17)
Internal volume dm ³	446	694	945
Type of refrigerant g, GWP	R290, 150, 3	R290, 150, 3	R290, 150, 3
tCO ² -ekv	0,00045	0,00045	0,00045
Electrical connection V, Hz	230 1N, 50/60	230 1N, 50/60	230 1N, 50/60
Connected load kW	0,51	0,52	0,52
Enclosure class	IP44	IP44	IP44
Net weight kg	104	136	169
Unit volume m ³	1.0	1.4	1,9
Unit dimensions mm			
height	1500	1500	1500
depth	750	750	750
width	900	1300	1700

Due to continuous product development we reserve the right to technical changes without notice.



Refrigerated display, CDD serie

- Temperature range: **+4...+15°C** (maximum ambient temperature of +25 °C in cold storage)
- Refrigerator modules: **CH1**
- Unit modules: **1**

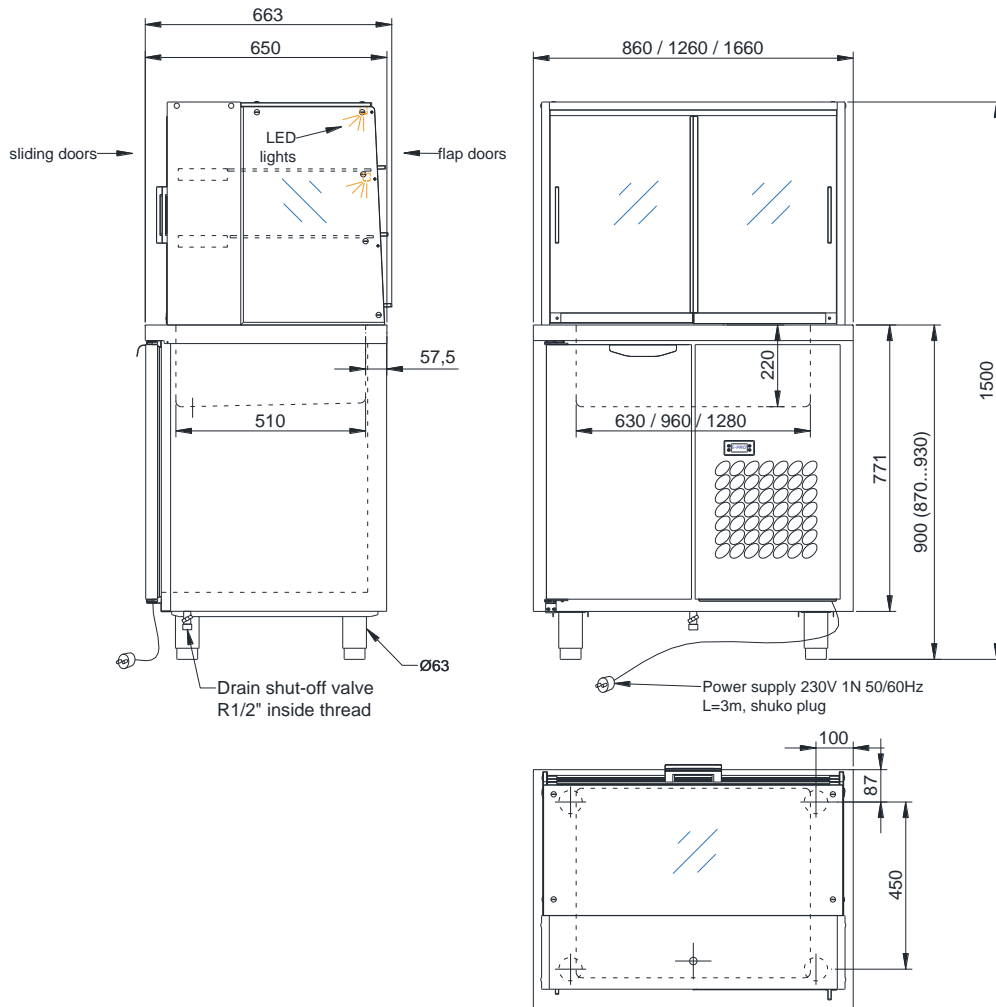


TECHNICAL DATA			
Model	CDD-1-CH1	CDD-1-CH1-1	CDD-1-CH1-1-1
External dimensions w x d x h mm	860x650x1500	1260x650x1500	1660x650x1500
Temperature range cupboard (cold well and display case) °C	+4...+15 (+6...+17)	+4...+15 (+6...+17)	+4...+15 (+6...+17)
Internal volume dm ³	532	824	1118
Type of refrigerant, charge g, GWP	R290, 150, 3	R290, 150, 3	R290, 150, 3
tCO ² -ekv	0,00045	0,00045	0,00045
Electrical connection V, Hz	230 1N, 50/60	230 1N, 50/60	230 1N, 50/60
Connected load kW	0,52	0,53	0,59
Enclosure class	IP44	IP44	IP44
Net weight kg	114	148	183
Unit volume m ³	1.1	1.6	2,1
Unit dimensions mm			
height	1650	1650	1650
depth	750	750	750
width	900	1300	1700

Due to continuous product development we reserve the right to technical changes without notice.



Refrigerated display, CDDH serie

- Temperature range **+4...+15°C**, highest shelf is neutral (maximun ambient temperature of +25 °C in cold storage)
- Refrigerator modules: **CH1**
- Unit modules: **1**

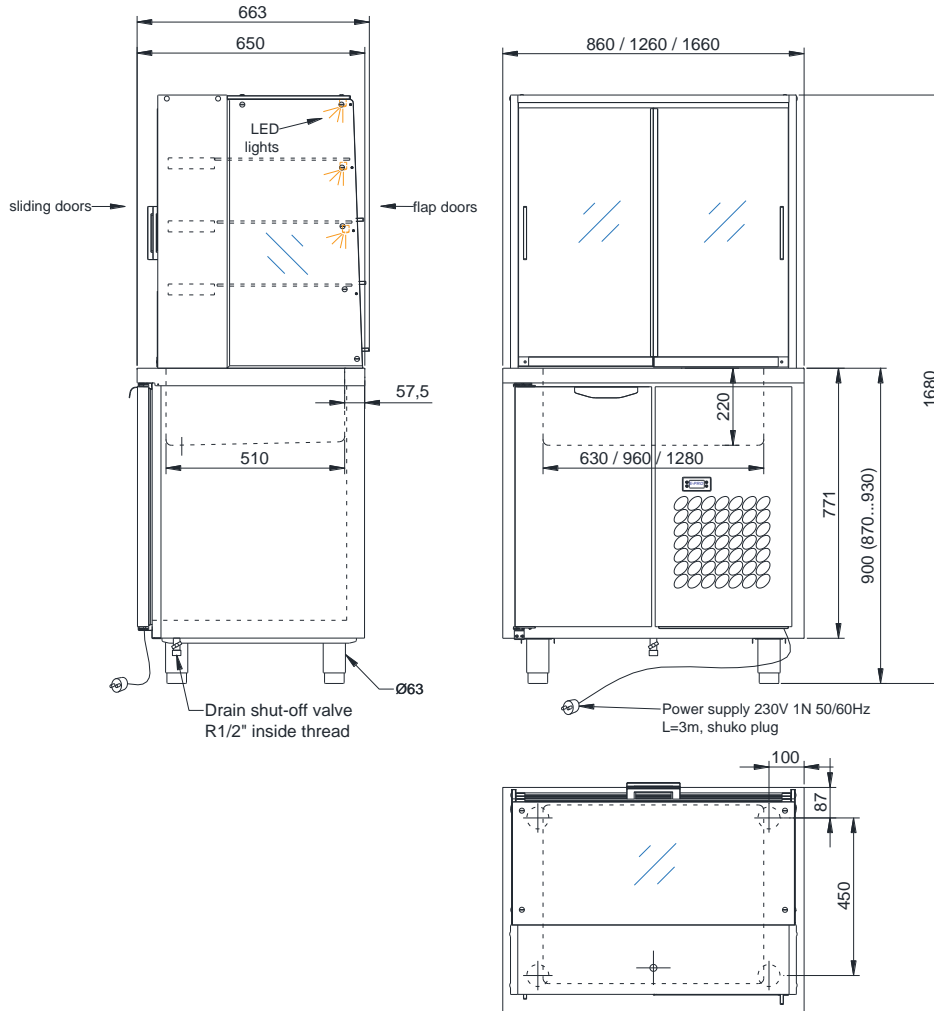

TECHNICAL DATA			
Model	CDDH-1-CH1	CDDH-1-CH1-1	CDDH-1-CH1-1-1
External dimensions w x d x h mm	860x650x1680	1260x650x1680	1660x650x1680
Temperature range cupboard (cold well and display case) °C	+4...+15 (+6...+17)	+4...+15 (+6...+17)	+4...+15 (+6...+17)
Internal volume dm ³	618	954	1291
Type of refrigerant, charge g, GWP	R290, 150, 3	R290, 150, 3	R290, 150, 3
tCO ² -ekv	0,00045	0,00045	0,00045
Electrical connection V, Hz	230 1N, 50/60	230 1N, 50/60	230 1N, 50/60
Connected load kW	0,53	0,60	0,61
Enclosure class	IP44	IP44	IP44
Net weight kg	124	160	197
Unit volume m ³	1.3	1.8	2,4
Unit dimensions mm			
height	1850	1850	1850
depth	750	750	750
width	900	1300	1700


Due to continuous product development we reserve the right to technical changes without notice.





Refrigerator modules


CH1 Refrigerator module 500W without drawer, temperature range +4...+15°C



CH1

Unit modules

1 Cupboard with a closed door, two removable shelves and four pairs of removable shelf brackets



1