

## TECHNICAL DATA E-PRO

### Refrigerated cold well

The E-Pro range of cold units includes various types of refrigerated drawers, cabinets and worktops. Thanks to the flexible modular construction, they are easy to combine to create a customised food service system that best suits personal requirements. All units are made of stainless steel and comply with the hygiene standards for professional kitchens.



#### GENERAL

- Products are designed for the short-term storage and serving of cold food
- All surfaces are made of stainless steel
- Ø63mm adjustable feet, with a height adjustment range of -30/+30mm
- GN-sized cupboards and cold well
- Removable PVC plastic magnetic gaskets
- The refrigerated wells have hygienic rounded corners and GN1/1 dividers as standard option

#### PERFORMANCE

- The technical features of products are designed to meet the requirements of cold storage in +30°C ambient temperature. The capacity is verified by laboratory experiments
- The temperature can be adjusted between +4 and +6°C. Temperature is +4 to +12°C in cold well
- The thermostat control includes a digital temperature display
- The ventilated refrigeration module guarantees even temperature distribution
- Two refrigeration machine options


#### TECHNICAL FEATURES

- The units have 50mm thick walls, insulating material polyurethane
- CFC and HCFC free
- The refrigerant is R290
- The refrigeration module is removable without tools and comes with automatic defrost and evaporation of defrost water
- All E-Pro cold units are CE marked
- Two refrigeration machine options



# Refrigerated cold well, CDGNS serie

- Temperature range: **+4...+6°C** (maximum ambient temperature of +30 °C in cold storage)
- Refrigerator modules 460mm wide model: **C1**
- Refrigerator modules 860mm wide model: **C1, CH1**
- Refrigerator modules 1260mm wide model: **CH1**
- Unit modules: **1**

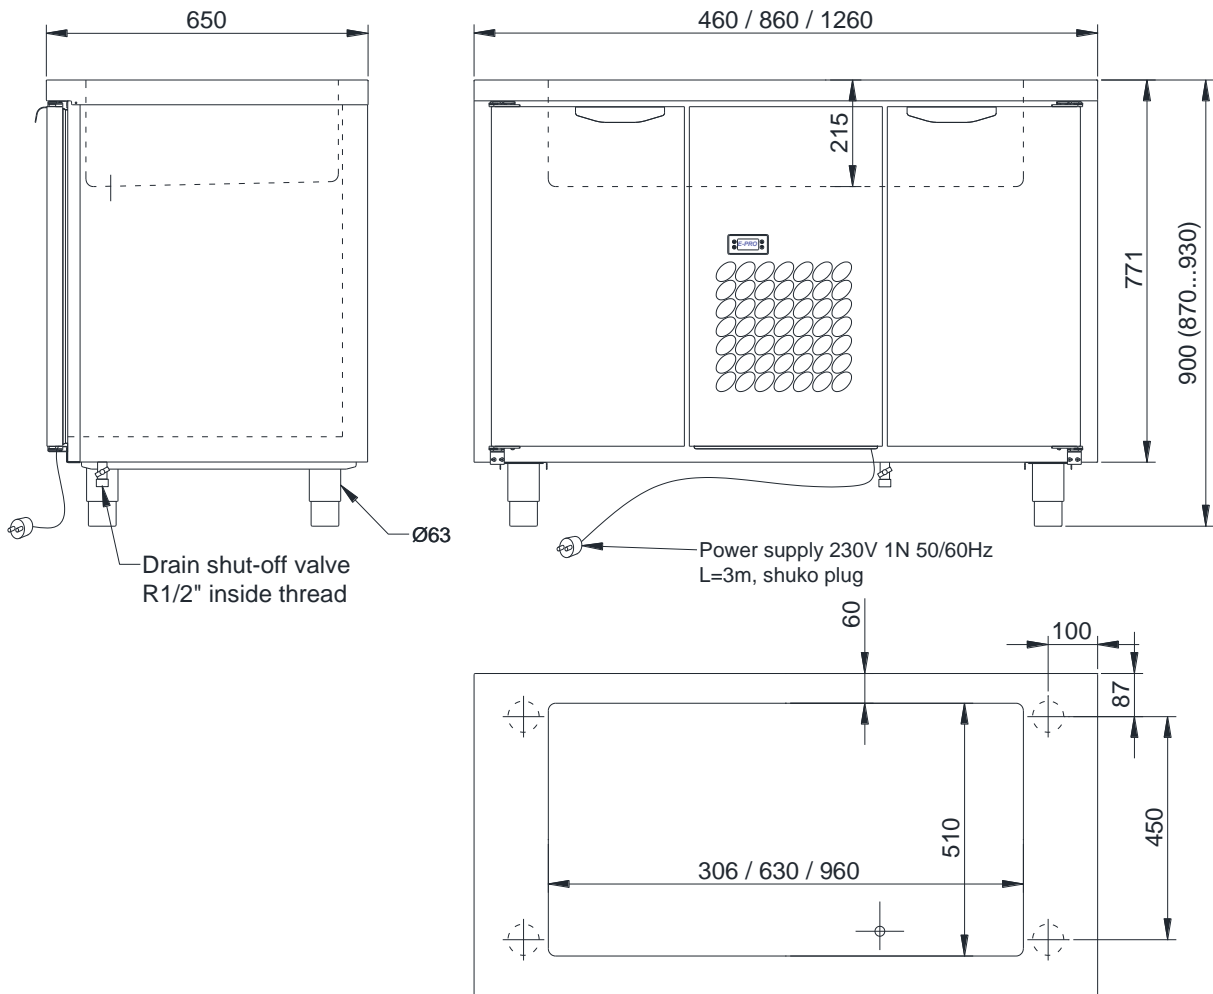

TECHNICAL DATA			
Model	CDGNS-C1	CDGNS-1-C1	CDGNS-1-CH1-1
External dimensions w x d x h mm	460x650x900	860x650x900	1260x650x900
Temperature range (cold well and display case) °C	+4...+6 (+4...+12)	+4...+6 (+4...+12)	+4...+6 (+4...+12)
Internal volume dm <sup>3</sup>	92	182	292
Type of refrigerant, charge g, GWP	R290, 150, 3	R290, 150, 3	R290, 150, 3
tCO <sup>2</sup> -ekv	0,00045	0,00045	0,00045
Electrical connection V, Hz	230 1N, 50/60	230 1N, 50/60	230 1N, 50/60
Connected load kW	0,25	0,25	0,50
Enclosure class	IP44	IP44	IP44
Net weight kg	62	94	131
Unit volume m <sup>3</sup>	0,4	0,7	1,0
Unit dimensions mm			
height	1050	1050	1050
depth	750	750	750
width	500	900	1300

Due to continuous product development we reserve the right to technical changes without notice.







**Refrigerator modules**

**C1** Refrigerator module 250W without drawer, temperature range +4...+6°C

**CH1** Refrigerator module 500W without drawer, temperature range +4...+6°C




**C1**



**CH1**

**Unit modules**

**1** Cupboard with a closed door, two removable shelves and five pairs of removable shelf brackets

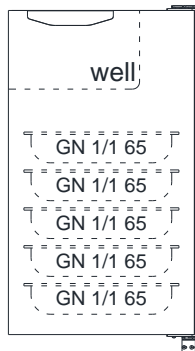

**1**